


# BV175



## 3-WAY BALL VALVE

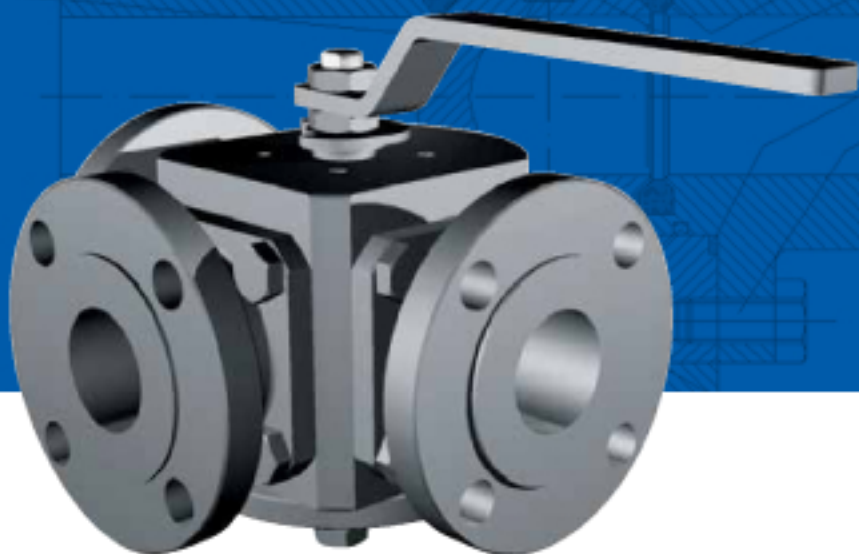

### Range of Production:

- SIZE from ½" to 6" (based on the pressure class)
- PRESSURE CLASS  
ANSI 150-300-600-900-1500-2500  
OTHER standard or non-standard pressure classes are optional ON REQUEST

### Standard Features:

- Split body
- Full or Reduced bore
- T or L port
- Soft seat
- Bubble tight seal
- Anti-blow out stem
- Antistatic device
- Fire Safe design
- O-Ring on primary sealing – Graphite on secondary sealing
- Flanged ends (RF – RTJ)
- Lever or gear operated (depending on size and class)

### Available Features:

- Metal to Metal seat
- Lip-seal on primary sealing
- Graphite packing on stem sealing for FET
- Locking device
- Welded or clamped ends
- Extended stem
- Pneumatic actuator, single or double action
- Hydraulic actuator
- Electric actuator
- Gas over oil
- Bare stem (top-mounting flange to ISO 5211)